



Barrier Washer Extractor



Capacity: 35/60/110kg

Features

- Clean unloading side is separated from soiled loading side.
- Softmount with air bags, springs, and shock absorbers.
- Stainless steel drum, tub, and door.
- Stainless steel panels.
- Permanently lubricated bearings.
- Intelligent electronic balancing system.
- Automatic positioning of the inner drum.
- Standard configuration includes 5 chemical compartments and 5 hoses for dosing pumps.
- Mechanical and electronic double door locks.
- Heavy duty pneumatic water valves, drain valves and steam valves.

Control


- Full-color touchscreen control offers 50 programs.
- Freely programmable and available in multiple languages.
- USB connection and networking capability.
- Remaining time indicator.

Options

- 2 pockets for 110kg.
- Automatic weighing.
- Programmable Logic Controller.

Specifications		XL35	XL60	XL110
Control		Touch	Touch	Touch
Capacity	kg	35	60	110
Cylinder Diameter	mm	774	1078	1078
Cylinder Depth	mm	737	749	1204
Volume	liter	347	684	1099
Cold Water Inlet	inch	1	1.5	1.5
Hot Water Inlet	inch	1	1.5	1.5
Steam inlet	inch	1/2	1	1
Dosing inlet	inch	3/4	3/4	3/4
Compressed air inlet	mm	φ8	φ8	φ8
Drain Diameter	mm	ø 76	ø 110	ø 110
Motor Power	kW	3.5	5.5	7.5
Three-phase Heating Power	kW	18	30	45
Three-phase Rated Power	KW	21.5	35.5	52.5
Three-phase Electric Current	A	33/57	54/94	80/138
Extraction Speed	RPM	765	650	650
G-Force		250	250	250
Voltage	380V/50Hz/60Hz/3ph			
	Contact us for other voltages			
Overall Width	mm	1320	1595	2050
Overall Depth	mm	1183	1485	1485
Overall Height	mm	1475	1995	1995
Net Weight	kg	700	2110	2360
Packing Width	mm	1420	1695	2150
Packing Depth	mm	1283	1585	1585
Packing Height	mm	1575	2095	2095
*Compressed air inlet only applies to steam heating models.				

Oasis preserves the right to change the machines and the specification at any time without prior notice.

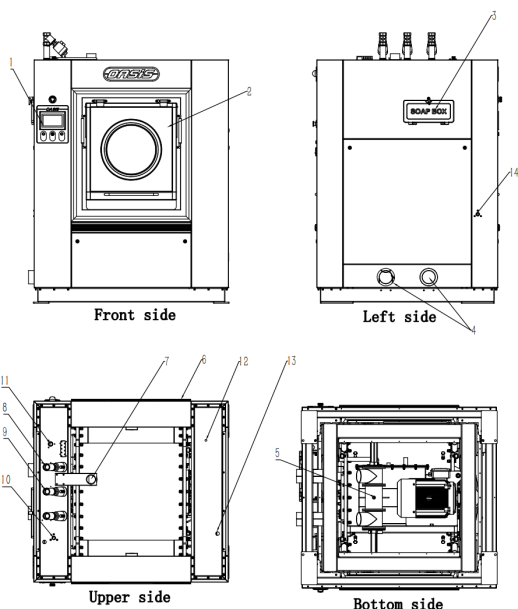

- | | |
|---------------------|---------------------|
| 1. Computer | 8.Cold water inlet |
| 2.loading door | 9.Hot water inlet |
| 3. Soap box | 10.Soap water inlet |
| 4. Lateral drainage | 11.Steam inlet |
| 5.Bottow drainage | 12.air inlet |
| 6.Delivery door | 13.Cable |
| 7.Air tube | 14.Sampling |



Jinan Oasis Dry Cleaning and Laundry Equipment Co.,Ltd.

☎ Tel: +86-531-85701288 85711288

✉ E-mail: inquiry@oasisle.com

🌐 Http://www.oasislaundrygroup.com

📍 Add: No.39, Lan Xiang Middle Road, Jinan City, China